

NORFOLK

Premier Mobile Extinguisher

NRAF135 – AFFF FOAM



The Aqueous Film Forming Foam (AFFF) additive is a blend of perfluorinated and hydrocarbon surfactants.

On A class fires the foam enhances the cooling ability of the water base. On class B fires the foam enables the formation of an aqueous film capable of spreading on the surface of burning fuels, which prevents vapour production and seals the surface from oxygen.

AFFF will extinguish class A (carbonaceous) fires and class B (flammable liquid) fires.

Features

- ❖ Manufactured in accordance with and tested to BS EN1866
- ❖ Approved by The European Marine Equipment Directive (Ships Wheel-marked)
- ❖ CE-marked in accordance with the PED
- ❖ Colour coded labels
- ❖ External Co2 side cylinder
- ❖ Rilsan coated internally and externally giving maximum protection against corrosion
- ❖ Safe and reliable
- ❖ Quality assured for long service life
- ❖ Manufactured in United Kingdom



Technical Specification

Model	Capacity (Litres)	Fire Rating	Temp Range	Operating Pressure (Bar) @ 20°C	Discharge Duration (Secs)	Discharge Range (M)	Width (mm)	Depth (mm)	Height (mm)
NRAF135	135	IVB	+5° to +60°C	14.5	200	14	710	770	1230

Britannia Fire reserve the right to alter the specification of the product without prior notice



Tel +44 (0)1508 488416
www.Britannia-Fire.co.uk


NORFOLK 135 LITRE AFFF FOAM MOBILE EXTINGUISHER

ADDITIONAL SPECIFICATIONS

Side Cylinder	1.0kg CO ²
Operating Pressure @ 20°C	14.5bar
Test Pressure (PT)	26bar
Maximum Allowable Pressure (PS)	18bar
Minimum Burst Pressure	55bar
Cylinder Material	3mm Thick Mild steel to EN 10111 - DD12
Nutring	Zinc Alloy to EN 1774 - ZnA14 (ZL3)
Headblock	Brass BS2874 CZ122
Hose	Synthetic rubber reinforced with high tensile wire braid
Full Weight	224kg
Empty Weight	88kg
Finish	Nylon coating

COMPONENT PART

ITEM	DESCRIPTION	PART No.
A	Body Assembly	BOD20WF
B	1.0KG Side Cylinder Assy	NCS1000
C	6m Discharge Hose Assy	HS0010
D	Foam Control Lance/Swivel Assy	HS0410
E	Nutring	BRH0105
F	Headblock Assy	NRH0560
G	CO ² Hose Assy	HS0130
H	Wheel	WHL030
I	Washer	WC0140
J	Split pin	WC0150
-	Syphon Tube (Internal)	NRH0575
-	Gas Tube (Internal)	NRH580
-	Pull Tight Seal (not shown)	BRH0175
-	AFFF Foam Charge	FOAM250

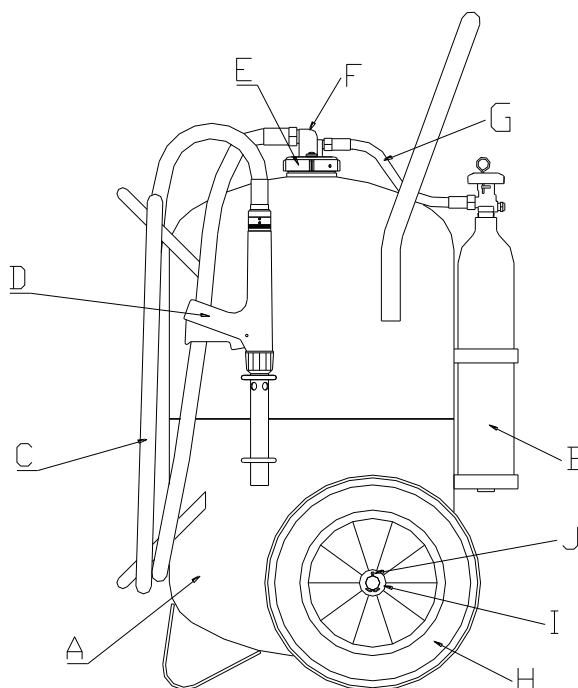

Britannia Fire Ltd

Ashwellthorpe Industrial Estate, Ashwellthorpe, Norwich, NR16 1ER, ENGLAND

Tel: +44 (0)1508 488416 Fax: +44 (0)1508 481753

www.britannia-fire.co.uk